



CL50 Pro Process Data AOI Guide, v2

1/4/2022

This document covers the installation and use of an Add-On Instruction (AOI) for the Logix Designer software package from Rockwell Automation. This AOI handles cyclic IO-Link Process Data In and Process Data Out to and from a Banner CL50 Pro device via an IO-Link Master connected to an Allen-Bradley PLC. The AOI covers parsing and display of the CL50 Pro Process Data Out. The AOI has one User Defined Tag data type.

Components

Banner_CL50Pro_PD_v2.L5X

UDT Packaged with the AOI

Banner_CL50Pro_PDO_v2

Other AOIs Available Separately

Banner has AOI files for controlling other Banner IO-Link devices and for a variety of IO-Link Masters. Banner also has AOI files for easily handling Banner device Parameter Data.


Contents

- 1. Installation Process 1
- 2. Configuring the IO-Link Master 3
- 3. Configuring the AOI..... 4
- 4. Using the AOI..... 7
- Appendix A K30 Pro Process Data 8
- Appendix B IO-Link Master Cheat Sheet 9


1. Installation Process

This section describes how to install the AOI in Logix Designer software.



1. Open a project.
2. In the Controller Organizer window, right-click on the Add-On Instruction folder. Select the Import Add-On Instruction option.

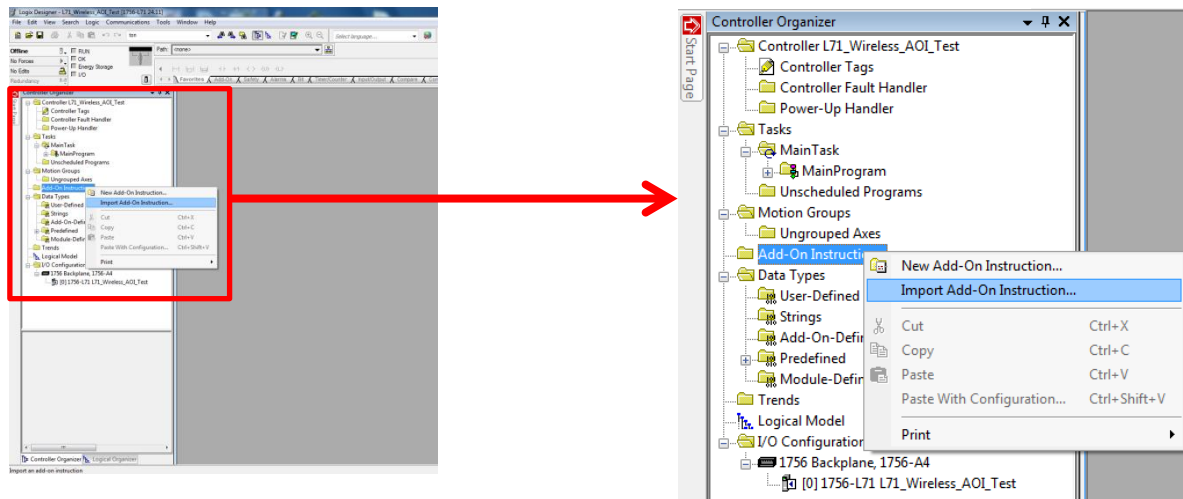

3. Navigate to the correct file location and select the AOI to be installed. In this example the "Banner_CL50Pro_PD_v2.L5X" file will be selected. Click the Open button.

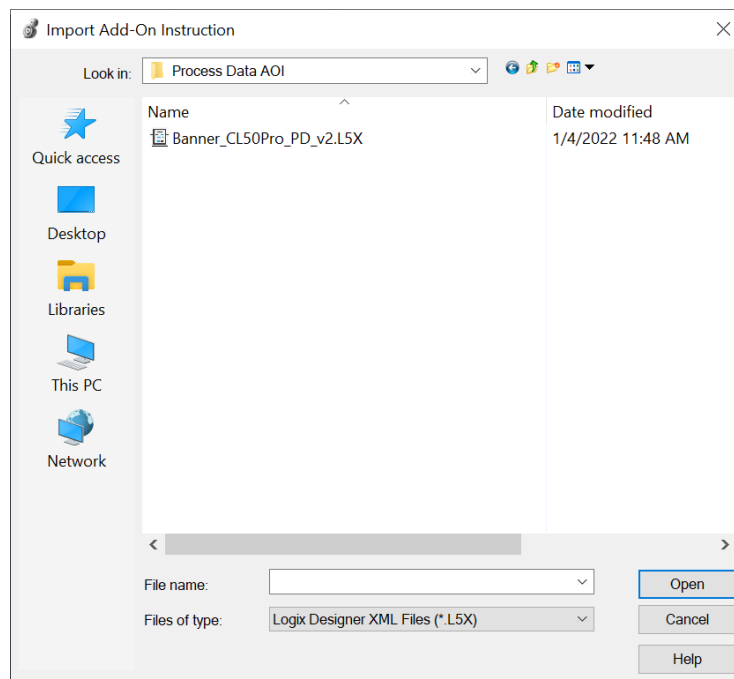

4. The Import Configuration window will pop up. The default selection will create all the necessary items for the AOI. Click the OK button to complete the import process.

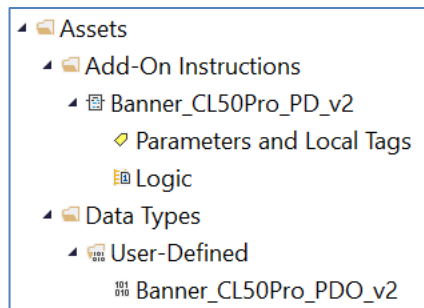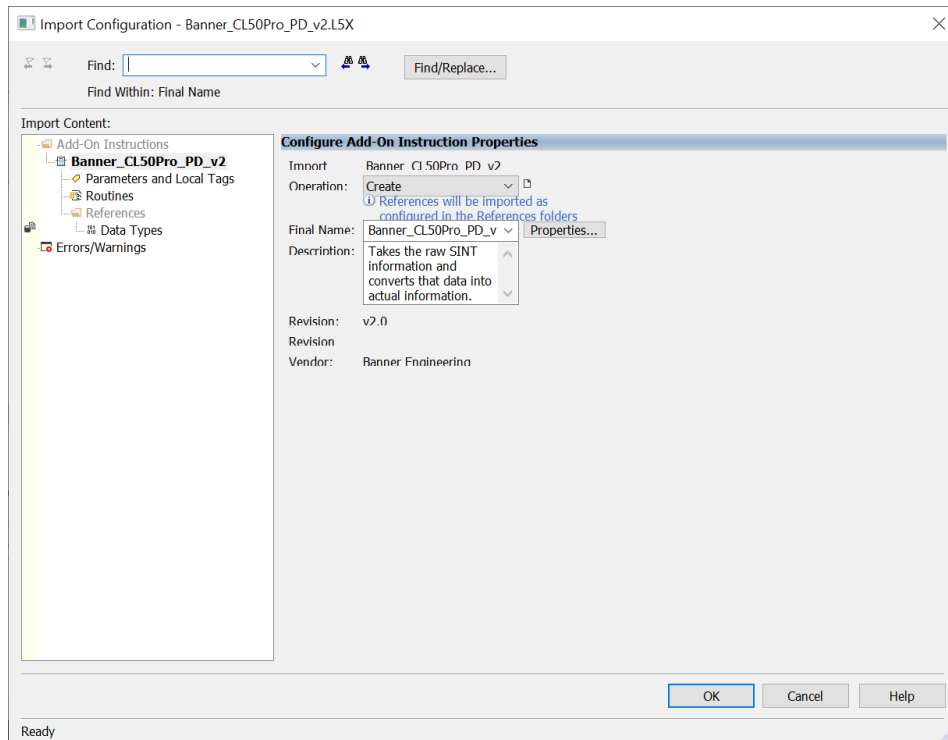

5. The AOI is added to the Controller Organizer window and should look like the picture at left.
6. AOI installation into the Logix Designer software is complete.


2. Configuring the IO-Link Master

Make an EtherNet/IP connection to the IO-Link Master.

Create an Ethernet communications module for the IO-Link Master device. The controller tags generated include Input (I) and Output (O) Assembly Instances. Each Assembly has a corresponding tag array. Creating this Class 1 EtherNet/IP implicit IO connection will provide the PLC access to the IO-Link device Process Data. Each port on the IO-Link Master is given a dedicated group of I and O registers. See the relevant IO-Link Master User's Guide for more information.

3. Configuring the AOI

1. Add the “Banner_CL50Pro_PD_v2” AOI to your ladder logic program. For each of the question marks shown in the instruction we need to create and link a new tag array. The AOI includes a new type of User Defined Tags (UDT): a custom array of tags meant specifically for this AOI.

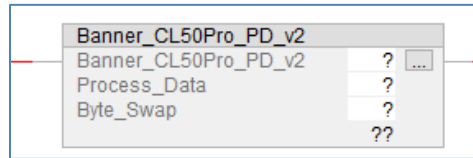

2. In the AOI, right-click on the question mark on the line labeled “Banner_CL50Pro_PD_v2”. Click New Tag. Name the new tag. This example uses the name “CL50Pro_IOLM1_00_PD_Status”. The example naming convention accounts for this being an CL50 Pro device connected to IO-Link Master #1, port #0, in our program. More masters could be named IOLM2, IOLM3, and different sensors could be connected at other port numbers, etc.

Note that the Data Type is the User-Defined Data Type (UDT) entitled “Banner_CL50Pro_PD_v2”. This custom-made array of registers is specially built to handle the memory needs of this AOI. Click Create to make the tag array.

New Tag

Name: Create ▼

Description:

Usage:

Type: Connection...

Alias For:

Data Type: ...

Parameter Connection:

Scope:

External Access:

Style:

☐ Constant

☐ Sequencing

☐ Open Configuration

☐ Open Parameter Connections

Cancel Help

- Now we will right-click on the question mark on the line labeled “Process_Data” in the AOI. Click on “New Tag”. Give the tag a name. This example uses the name “CL50Pro_IOLM1_00_PD”. Notice that the Data Type is “Banner_CL50Pro_PDO_v2”. Click Create.

This array will handle the displaying of the parsed Process Data In and Process Data Out for the K30 Pro device.

New Tag

Name: CL50Pro_IOLM1_00_PD

Create

Description:

Usage: <controller>

Type: Base Connection...

Alias For:

Data Type: Banner_CL50Pro_PDO_v2

Parameter Connection:

Scope: Test

External Access: Read/Write

Style:

☐ Constant

☐ Sequencing

☐ Open Configuration

☐ Open Parameter Connections


Cancel

Help


- The last line in the AOI is a setting to account for byte swapping. In the case of the CL50 Pro, the Process Data Out is three bytes long. IO-Link Masters may read each pair of bytes in either order, so this AOI must be ready to perform a byte swap. Enter a “0” or a “1” to toggle this setting. See Appendix B for more information.

- The final two steps required before we download and run the CL50 Pro Process Data AOI involve inserting a File Synchronous Copy (CPS) instruction. This instruction allows the AOI to write to the raw Process Data values found in the register tags of the IO-Link Master.

A CPS instruction is added to the AOI rung, this time after the AOI. This CPS instruction is used to copy Process Data Out from the AOI into the raw Process Data Out registers used by the IO-Link Master. See Appendix B for more information. In this example, we will connect the AOI's "PDO_DT[0]" to the starting byte location for port 3 in the Process Data Out side. The size to be copied is 3 bytes.

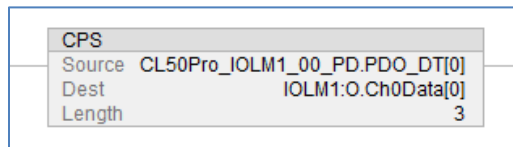


Here is what the entire rung looks like when completed.

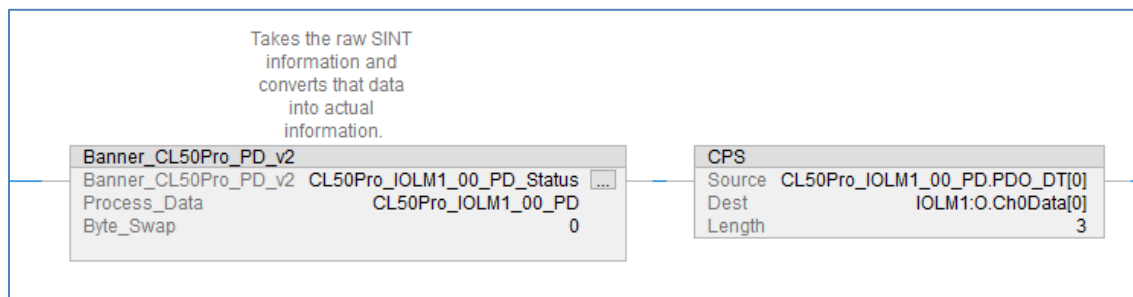

If a Banner IO-Link Master is being used, setup a Move block. Send a 1 to the Activate Outputs array value (see table for each port's value). As an example, if port 1 needs the process data outputs active then send a 1 to 181.

IO-Link Master Port	Activate Outputs
1	181
2	215
3	249
4	283
5	317
6	351
7	385
8	419

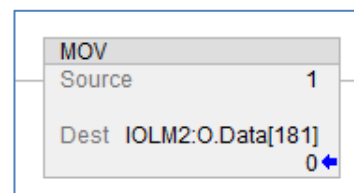

The "Banner_CL50Pro_PD_v2" AOI is now ready for use.

4. Using the AOI

The “Banner_CL50Pro_PD_v2” Add-On Instruction has created a group of tags representing the CL50 Pro Process Data, broken out into its component parts.

Look in the Controller Tags to find the name you used above. This example used the name “CL50Pro_IOLM1_00_PD”. The tag array, seen below, has individual pieces of information instead of unlabeled bits.

◀ CL50Pro_IOLM1_00_PD	{...}
▶ CL50Pro_IOLM1_00_PD.Color1	0
▶ CL50Pro_IOLM1_00_PD.Color2	0
▶ CL50Pro_IOLM1_00_PD.Animation	0
▶ CL50Pro_IOLM1_00_PD.Pulse_Pattern	0
▶ CL50Pro_IOLM1_00_PD.Speed	0
▶ CL50Pro_IOLM1_00_PD.Color1_Intensity	0
▶ CL50Pro_IOLM1_00_PD.Color2_Intensity	0
▶ CL50Pro_IOLM1_00_PD.Audible_State	0

Appendix A CL50 Pro Process Data

The CL50 Pro has 3 bytes of Process Data Out.

ProcessDataOut "Process Data Out Run Mode" id=V_Pd_OutRunMode

bit length: 24

data type: 24-bit Record

subindex	bit offset	data type	allowed values	default value	acc. restr.	mod. other var.	excl. from DS	name	description
1	0	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2					Color 1	The main color of the Animation. Custom Colors are defined in Parameter data
2	4	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2					Color 2	The secondary color of the Animation. Only used if Animation has two colors. Custom Colors are defined in Parameter data
3	8	3-bit UInteger	0 = Off, 1 = Steady, 2 = Flash, 3 = Two Color Flash, 5 = Intensity Sweep					Animation	The Animation type
4	11	3-bit UInteger	0 = Normal, 1 = Strobe, 2 = Three Pulse, 3 = SOS, 4 = Random					Pulse Pattern	The pattern of Animation
5	14	2-bit UInteger	0 = Medium, 1 = Fast, 2 = Slow					Speed	The speed of the Animation
6	16	3-bit UInteger	0 = High, 1 = Low, 2 = Medium, 3 = Off, 4 = Custom					Color 1 Intensity	The Intensity of Color 1, Custom Intensity defined in Parameter Data
7	19	3-bit UInteger	0 = High, 1 = Low, 2 = Medium, 3 = Off, 4 = Custom					Color 2 Intensity	The Intensity of Color 2, Custom Intensity defined in Parameter Data
8	22	2-bit UInteger	0 = Off, 1 = On, 2 = Pulsed, 3 = SOS Pulse					Audible State	The state of the audible segment

Appendix B IO-Link Master Cheat Sheet

Different IO-Link Masters behave differently in several ways. For one, the register locations where Process Data is stored varies. For another, some IO-Link Masters require byte-swapping and/or word-swapping. The tables below aim to define some of these differences. Note that these numbers are when using all default settings. IO-Link Masters can change the register locations to which Process Data is mapped in response to non-default, optional settings. See relevant IO-Link Master documentation for more information.

PDI (Process Data In) is found in the IO-Link Master's T->O (PLC "Input") Assembly Instance.

PDO (Process Data Out) is found in the IO-Link Master's O->T (PLC "Output") Assembly Instance.

Table 1. First Register of Process Data "SINT0"

Port	Allen-Bradley*		Control		Balluff		Turck		ifm		Banner	
	PDI	PDO	PDI	PDO	PDI	PDO	PDI	PDO	PDI	PDO	PDI	PDO
1	I.Ch0Data[0]	O.Ch0Data[0]	4	0	8	6	6	4	190	46	184	182
2	I.Ch1Data[0]	O.Ch1Data[0]	40	32	56	38	38	36	222	78	218	216
3	I.Ch2Data[0]	O.Ch2Data[0]	76	64	104	70	70	68	254	110	252	250
4	I.Ch3Data[0]	O.Ch3Data[0]	112	96	152	102	102	100	286	142	286	284
5	I.Ch4Data[0]	O.Ch4Data[0]	148	128	200	134	134	132	318	174	320	318
6	I.Ch5Data[0]	O.Ch5Data[0]	184	160	248	166	166	164	350	206	354	352
7	I.Ch6Data[0]	O.Ch6Data[0]	220	192	296	198	198	196	382	238	388	386
8	I.Ch7Data[0]	O.Ch7Data[0]	256	224	344	230	230	228	414	270	422	420

*see relevant Banner Allen-Bradley IO-Link Master AOI Guide and Allen-Bradley User Guides for more information on using device IODD files to aid in integration.

Note: Murr IO-Link Masters have configurable process data. Refer to the Murr IO-Link Master Instruction Manual for Process Data mappings.

Table 2. Byte-Swap

IO-Link Master	Byte Swap
Allen-Bradley	0
Control	1
Balluff	0
Turck	1
ifm	1
Murr	0
Banner	0

Specific hardware used in both tables (all default settings):

- Allen-Bradley Armor Block I/O IO-Link Master (1732E-8IOLM12R)
- Control 8-EIP IO-Link Master (99608-8)
- Balluff BNI006A (BNI EIP-508-105-Z015)
- Turck TBEN-L5-8IOL
- ifm AL1122
- Murr Impact67 E DIO 12 DIO4/IOL4 4P (Art.-No. 55144)

Banner IO-Link Masters (DXMR90-4K) have a port status register. The register gives the status of the port. It gives information on if the port has an IO-Link device connected and if Process Data is valid. This is optional information but is useful for troubleshooting. The data comes into the PLC as bytes while the literature shows the value as a word. The table below gives the upper and lower byte data location in the PLC. The upper byte includes bits 15 through 8, while the lower byte has bits 7 through 0.

IO-Link Master Port	Upper Bits 15 - 8	Lower Bits 7 - 0
1	182	183
2	216	217
3	250	251
4	284	285
5	318	319
6	352	353
7	386	387
8	420	421

Port Status:

Bit0 = Connected?

Bit1 = Process Data Valid?

Bit2 = Event Pending?

Bit3 = Ready for ISDU?

Bit4 = Pin4 SIO State

Bit5 = Pin2 SIO State

Bit6-7 = Pin4 Mode:

SDCI Mode = 0

SIO Input Mode = 1

SIO Output Mode = 2

Bit8-10 = Pin2 Mode:

Disabled = 0

Input Normal = 1

Output = 2

Diagnostic Input = 3

Inverted Input = 4