


# CL50 Column Lights



## 50 mm Column Lights

- All-purpose and easy-to-install multicolor indicators
- Indication provides easy-to-see operator guidance and equipment status indication at long distances
- Display up to three distinct colors
- 100 to 240 V ac operation or 18 to 30 V dc operation
- IEC IP67-rated housing; suitable for industrial environments
- No assembly required—compact devices are completely self-contained—no controller needed

# CL50 Column Lights

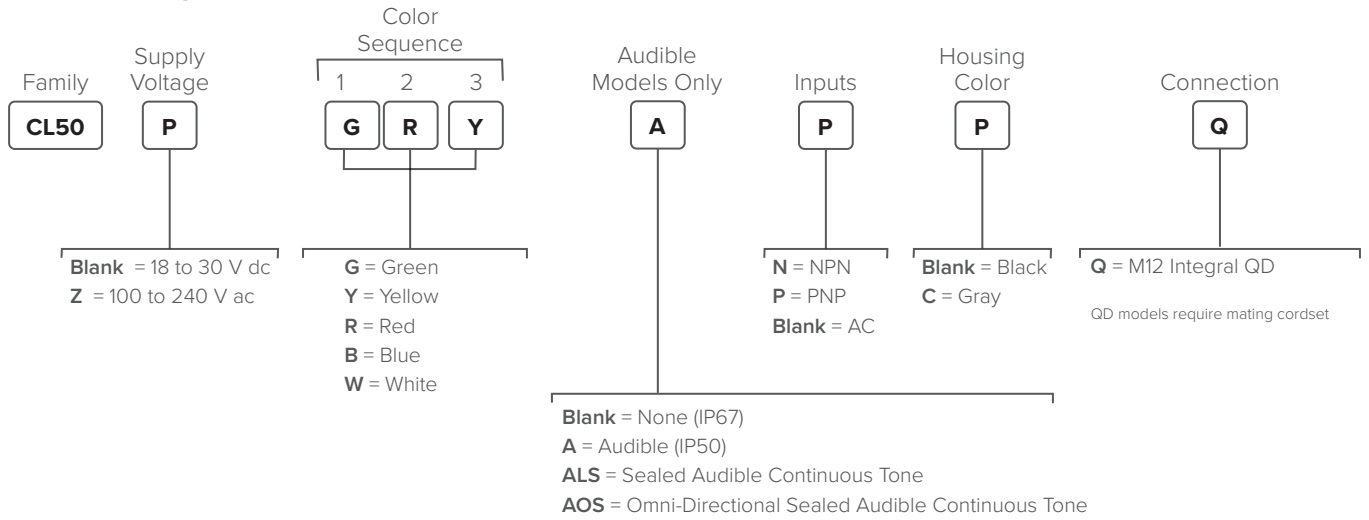

**Audible**  
max. intensity  
92 db @ 1 meter  
(typical)



**Sealed Audible**  
max. intensity  
94 db @ 1 meter  
(typical)



**Sealed Omni-Directional Audible**  
Standard: max. intensity  
99 db @ 1 meter (typical)  
Intensity Adjust: max. intensity  
95 db @ 1 meter (typical)

## Specifications

<b>Power</b>	18 to 30 V dc 21 to 27 V ac 100 to 240 V ac
<b>Operating Conditions</b>	Non-Audible: -40 to 50 °C Audible: -20 to 50 °C
<b>Construction</b>	Bases, Covers, Light Segment: Polycarbonate
<b>Environmental Rating</b>	General-Purpose and Sealed Audible: IEC IP67 Standard Audible: IEC IP50
<b>Certifications</b>	CE c UL US

Don't see what you need?  
Refer to CL50 Pro models on  
[bannerengineering.com](http://bannerengineering.com) for  
additional possibilities



Banner Engineering Corp.

9714 10th Avenue North • Minneapolis, MN 55441 • 1-888-373-6767 • [www.bannerengineering.com](http://www.bannerengineering.com)