

K100 Basic Beacon




Highly Visible Indicator Provides Critical Signaling In Indoor and Outdoor Environments

- Single color device with five options to choose from
- Clear lens avoids false indications
- Easy installation with brackets or on conduit and M12 quick disconnect
- Four unique animations enable intuitive indication
- Sealed audible model with continuous audible tone at 101 dB

BANNER[®]
more sensors, more solutions

K100 Basic Beacon

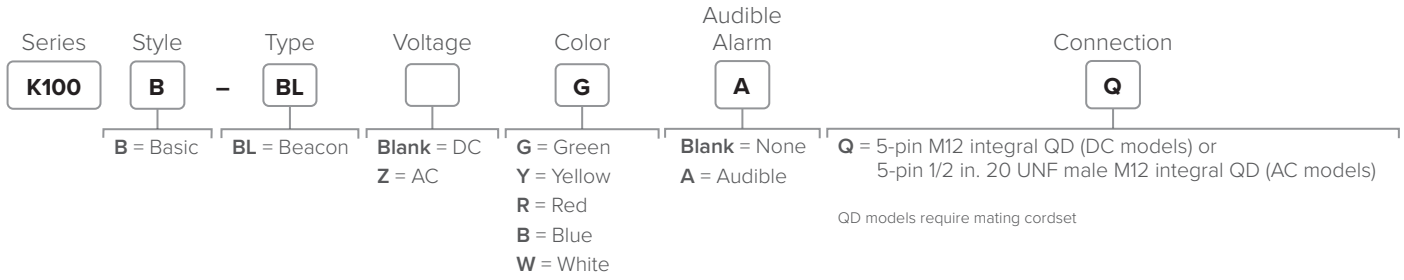

Specifications



Supply Voltage	12 to 48 V DC 100 to 240 V AC, 50 Hz to 60 Hz
Audible Characteristics	101 dB, 2.5 KHz, at 1 m
Operating Conditions	-40 to +60 °C
Construction	Polycarbonate
Environmental Rating	IP66, UL Type 4X
DC Certifications	



Accessories

Mounting Bracket



LMB36RA

Cordsets



5-Pin M12 for DC Models
Straight connector models listed; for right-angle models, add RA to the end of model number (example, MQDC1-506RA)

MQDC1-506
2 m (6.5')
MQDC1-515
5 m (15')
MQDC1-530
9 m (30')

Elevated Mount System



Banner Engineering Corp.

9714 10th Avenue North • Minneapolis, MN 55441 • 1-888-373-6767 • www.bannerengineering.com