

70 mm Modular Tower Lights



TL70 Basic Industrial Tower Light That Provides Cost-Effective Status Indication


- Unique pin-to-position design allows for quick and easy installation
- Modular construction for configuration flexibility
- Features a very loud adjustable audible alarm that goes up to 104dB
- Pre-assembled options with up to 5 LED segments, or 4 LED segments with audible
- Available with 7 colors: white, blue, green, yellow, red, orange, and violet
- Steady or flash animation options available

BANNER[®]
more sensors, more solutions


TL70 Basic Tower Lights

Pre-assembled Models

Color/Alarm	Connection	Models
Green, Yellow, Red	5-pin M12 integral QD	TL70B-GYRQ
Green, Yellow, Red, Alarm		TL70B-GYRAQ
Blue, Green, Yellow, Red		TL70B-BGYRQ
Blue, Green, Yellow, Red, Alarm	8-pin M12 integral QD	TL70B-BGYRAQ
White, Blue, Green, Yellow, Red		TL70B-WBGYRQ

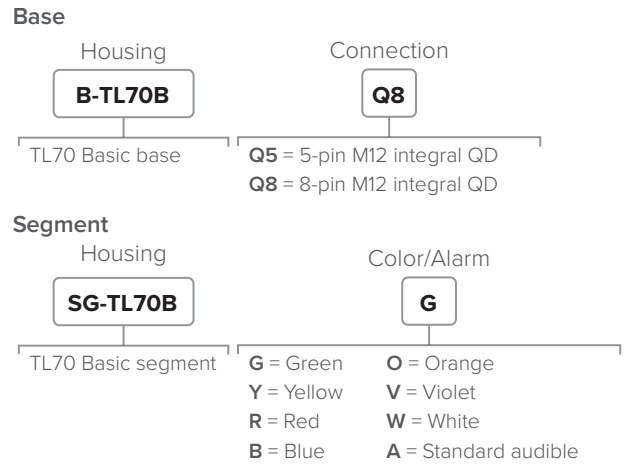

Specifications

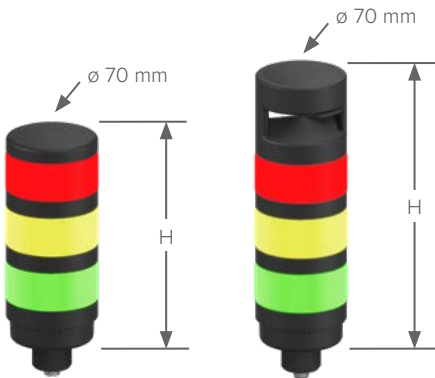


LED Count	Tower Height (H)	Tower Height with Audible (H)
1	87 mm	144 mm
2	137 mm	194 mm
3	187 mm	243 mm
4	236 mm	293 mm
5	286 mm	—

Supply Voltage	12 to 30 V DC
Audible Alarm	104 dB at 1 m
Construction	Polycarbonate
Operating Conditions	-40 to +50 °C
Environmental Rating	IP65
Certifications	CE, UL LISTED, UK CA

Accessories

Elevated Mount System

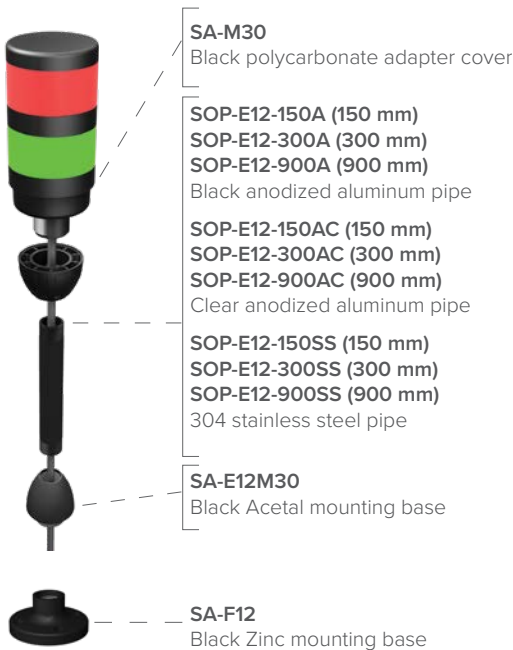

Banner Engineering Corp.

9714 10th Avenue North • Minneapolis, MN 55441 • 1-888-373-6767 • www.bannerengineering.com