

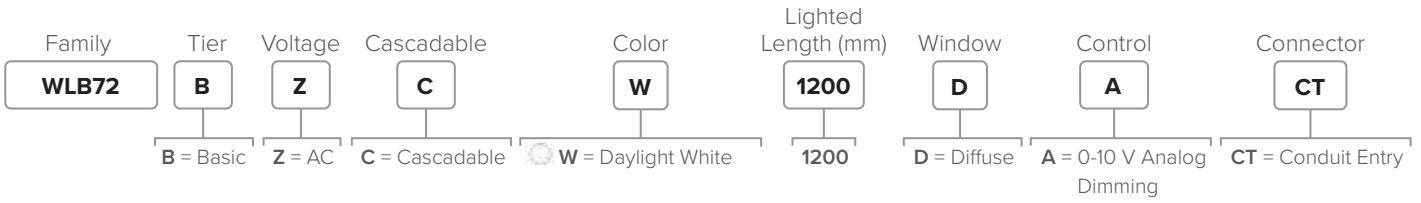
WLB72 Basic



Industrial LED Strip Light




- Improve visibility with bright, uniform illumination
- Reduce costs through high-efficacy, low-maintenance design
- Simplify installation and wiring with versatile, reliable hardware

WLB72 AC Models



Specifications



Operating Voltage	120 V ac to 277 V ac
Power	52 Watts
LED Lifetime	$L_{70} = 50,000$ hours
Efficacy	130 Lumens/Watt
Lumens	6800
Operating Conditions	-40 to +50 °C
Certifications	  

Accessories



LMBWLB72F
surface mount



LMBWLB72RAS
angular adjustment



LMBWLB72HK5
suspended



Challenge

- Hard guards around robotic work cells can block overhead lighting, resulting in a dimly lit area
- Poor lighting makes maintenance more challenging to complete quickly and effectively
- Harsh lighting can create an uncomfortable work environment for staff

Solution

- WLB72 strip lights brightly illuminate the area so staff can easily monitor and maintain equipment
- The diffuse window reduces glare and hotspots, which can cause eye strain
- Includes 0 –10 V dimming for intensity control and customization
- Adding light where needed is a more budget-friendly solution than adding more high bay fixtures
- The energy-efficient LED lights provide years of maintenance-free operation and a low total cost of ownership (TCO)



Banner Engineering Corp.

9714 10th Avenue North • Minneapolis, MN 55441 • 1-888-373-6767 • www.bannerengineering.com