

WLS15 Strip Light




Low Profile LED Strip Light

- Improves visibility, safety, and efficiency
- 15 mm low profile fits in tight spaces that other lights cannot
- Installs in minutes without impacting existing application framework
- Professional quality and certified product
- EZ-STATUS® models combine illumination and indication
- High Intensity models available with double the lumens of standard (24 V dc only)



Professional, Low-Profile LED Lighting

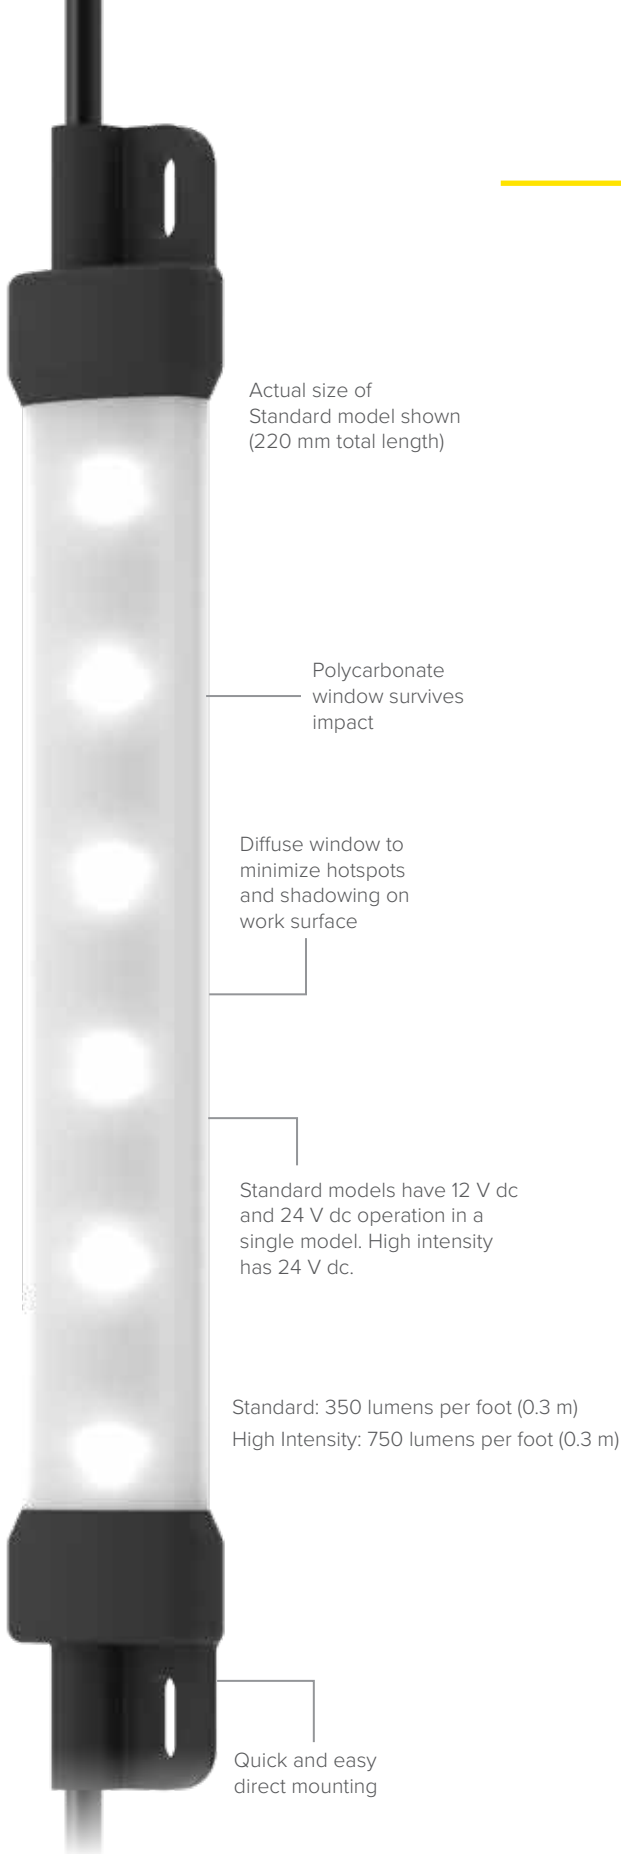

Standard and High-Intensity Illumination

- Improve worker performance by lighting under shelves, inside doors, above bins, and in cabinets
- Cascade models require only a single electrical installation
- Setup is quick and easy with simple mounting options, reducing time spent on installation
- Doubles as a detachable light source for troubleshooting assistance
- Rugged and industrial construction prevents breakage and potential product contamination
- 50,000 hour L70 LEDs ensure long life and minimize maintenance



— Where You Need It



Dual-Color with EZ-STATUS®

- Models are available with two colors in one device
- Combine white illumination with colored indication
- Use two colors for status indication
- Amber LEDs available for photosensitive applications
- Slim, IP66, IP67 rated housing for industrial use
- Available in six lengths from 220 to 1200 mm
- Daisy chain power to multiple lights
- Optional snap clips for easy installation and repositioning

Illumination + Indication

- EZ-STATUS® combines illumination and multiple indication capabilities in a single device
- Promotes faster responses to status changes
- Improves ergonomics and limits wasted movement
- Reduces the risk of costly mistakes and accidents

Low 15.5 mm profile
designed to fit
anywhere (actual
height shown)

Internal aluminum
structure for
heat sinking and
improved lifetime

Overmolded
endcaps for
superior sealing

Standard Illumination Models

Family	Cascadable	Color	Length (mm)	Window	Construction	Connector
WLS15	X	DW	0360	D	S	C2
C = Cascadable X = Non Cascadable		DW = Daylight White WW = Warm White	0220 0640 0360 0920 0500 1200	D = Diffuse	S = Sealed (IP66, IP67)	C2 = 2 m Integral QP = 150 mm Integral Euro QD QS = 150 mm Integral cable with Deutsch DTM Models with a QD or Deutsch DTM connector require a mating cordset


Dual-Color Models

Family	Cascadable	Color 1	Color 2	Length (mm)	Window	Construction	Connector
WLS15	X	W	R	0360	D	S	C2
C = Cascadable X = Non Cascadable		W = Daylight White B = Blue G = Green	R = Red Y = Yellow A = Amber	0220 0640 0360 0920 0500 1200	D = Diffuse	S = Sealed (IP66, IP67)	C2 = 2 m Integral QP = 150 mm Integral Euro QD Models with a QD or Deutsch DTM connector require a mating cordset

High Intensity Models

Family	Cascadable	Color	Length (mm)	Window	Construction	Voltage	Connector
WLS15H	C	DW	0360	D	S	24	C2
C = Cascadable X = Non Cascadable		DW = Daylight White WW = Warm White	0360 0920 0640 1200	L = Light Diffuse	S = Sealed (IEC IP66 IEC IP67)	24 = 24 V DC	C2 = 2 m Integral QP = 150 mm Integral Euro QD Models with a QD or Deutsch DTM connector require a mating cordset

Specifications

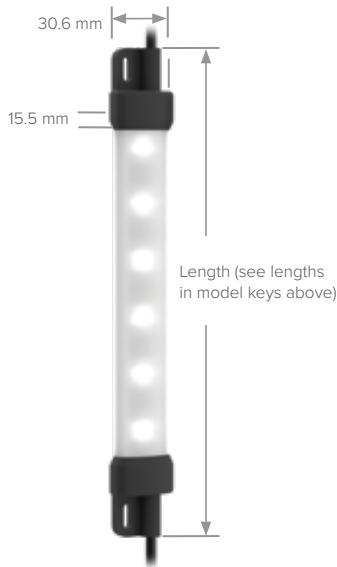

Power	Std & Dual: 12 V dc or 24 V dc nominal High Intensity: 24 V dc
Operating Conditions	Temperature: -40 to +60 °C Storage Temperature: -40 to +70 °C
Construction	Housing: Polycarbonate Endcaps: Polyamide
Environmental Rating	Rated IEC IP66 and IEC IP67 Suitable for wet locations per UL 2108
Certifications	

Accessories

<p>LMBWLS15-150S</p>	<p>LMBWLS15</p>	<p>PSW-24-1 Power Supply (Adapters included)</p>
<p>LMBWLS15MAG</p>	<p>LMBWLS15TF (Tape)</p>	
<p>M12 Connector Straight models listed; for right-angle, add RA to the end of the model number (example, MQDC-406RA)</p>	<p>4-Pin MQDC-406 2 m (6.5') MQDC-415 5 m (15') MQDC-430 9 m (30')</p>	<p>Double-ended M12 QD Straight/straight models listed. For straight/right-angle models, change SS to RS (example, MQDEC-403RS)</p>
<p>Deutsch Single-ended cordset with straight connectors for single-colored models</p>	<p>2-Pin DTMC-206 2 m (6') DTMC-215 5 m (15') DTMC-230 9 m (30')</p>	<p>4-Pin MQDEC-403SS 0.91 m (3') MQDEC-412SS 3 m (12') MQDEC-430SS 9 m (30')</p>
		<p>2-Pin DTMEC-2005 0.16 m (0.5') DTMEC-206 2 m (6') DTMEC-230 9 m (30')</p>