

WLS27 Series Strip Lights




Sealed LED Strip Lights

- Rugged, IP66, IP67 and IP69K design for harsh indoor and outdoor applications
- Single-, dual-, or multicolored models for custom illumination, indication and more
- EZ-STATUS® models combine illumination and indication
- Hazardous location models for gas and dust environments

Advanced Solutions

- Eight lengths available from 145 to 1130 mm
- Hi/Lo/Off settings are controlled by the wiring
- Available in 6 colors to meet your application needs
- Dual-color and multicolor models controlled by two or three wires

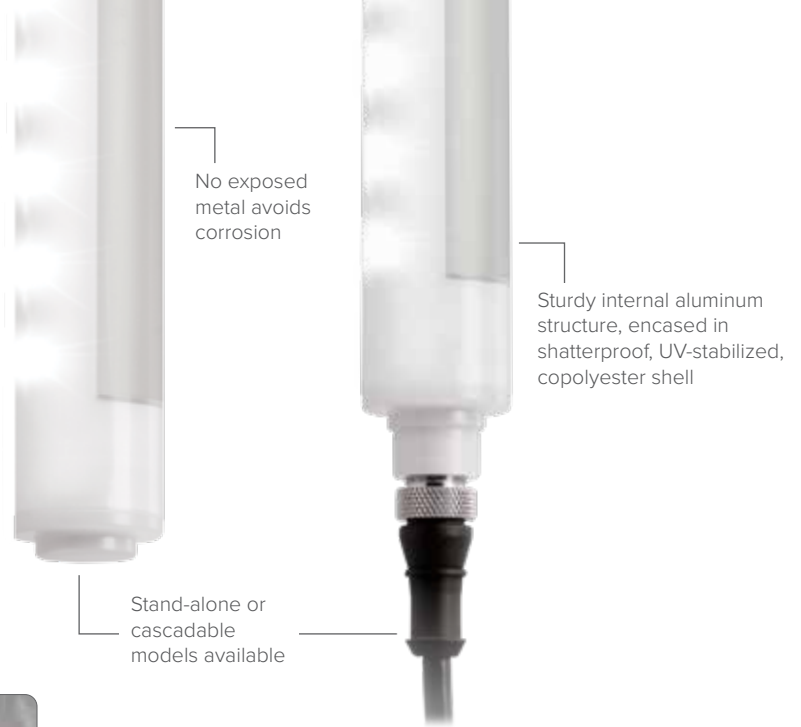


Single-Color

Challenge

- Enclosed area is dark, making it hard for operators to see potential problems
- Machines are exposed to washdown procedures
- Light must not break during operation and cleaning

Solution

- Bright LED illumination is rated for 50,000 hours
- Hygienic, IP69K certified housing for food processing and washdown environments
- Rugged design with shatterproof copolyester shell can be installed directly inside of the machine without worry

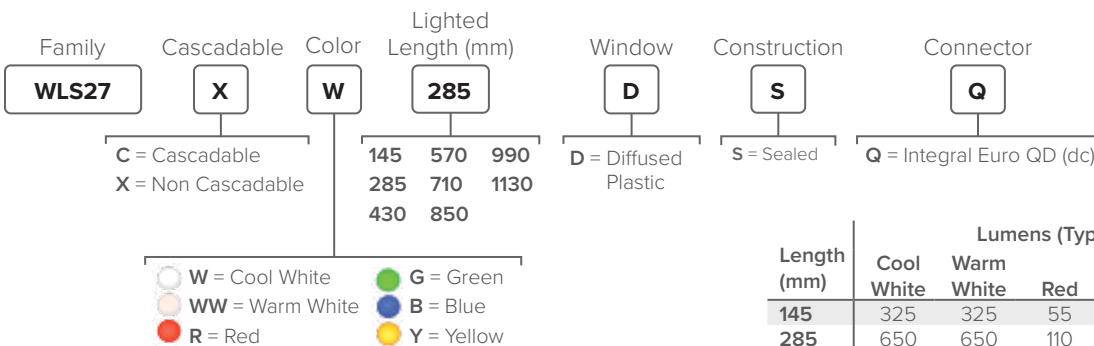

Length (mm)	Lumens (Typical @ 25 °C)						Typical Wattage* (Watts)
	Cool White	Warm White	Red	Green	Blue	Yellow	
145	325	325	55	180	40	50	4
285	650	650	110	360	80	100	7
430	975	975	165	540	120	150	11
570	1300	1300	220	720	160	200	15
710	1625	1625	275	900	200	250	19
850	1950	1950	330	1080	240	300	22
990	2275	2275	385	1260	280	350	26
1130	2600	2600	440	1440	320	400	30

*Typical operating wattage is measured at 24 V dc




Dual-Color

Challenge

- On large machines, it can take time to determine the source of a problem
- Once a problem is identified, high quality task lighting is required for troubleshooting

Solution

- Dual color lights alert operators to the machine condition and direct them to the location of the problem
- Allows operators to respond more quickly to status changes
- When the guard door opens, the light returns to white task lighting, providing clear visibility for troubleshooting

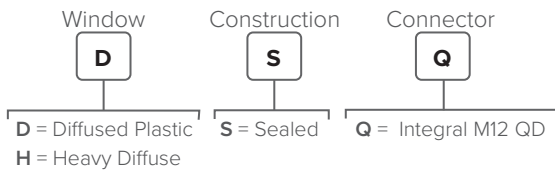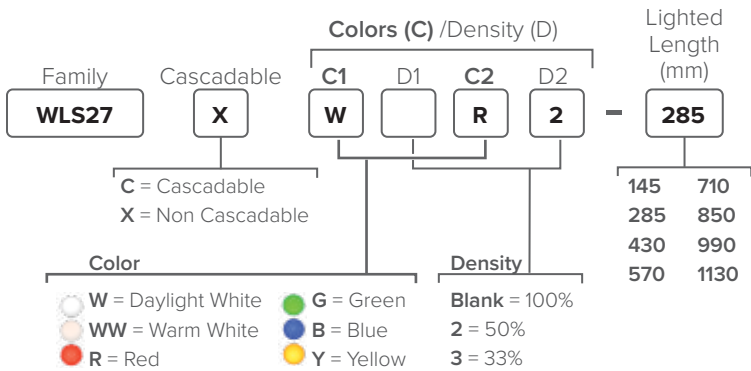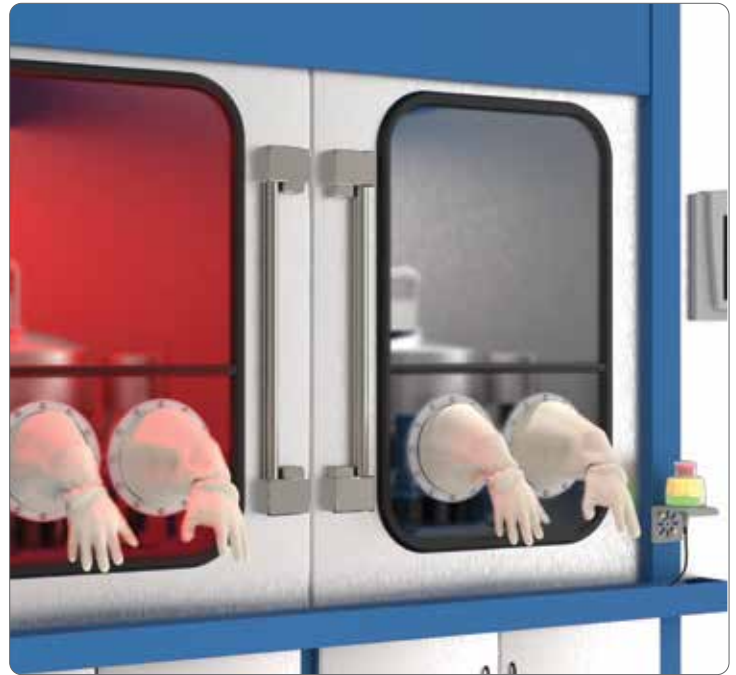

Length (mm)	Lumens (Typical @ 25 °C)					Typical Wattage* (Watts)
	White	Red	Yellow	Green	Blue	
145	238	100	75	150	55	4
285	475	200	150	300	110	7
430	713	300	225	450	165	11
570	950	400	300	600	220	15
710	1188	500	375	750	275	18
850	1425	600	450	900	330	22
990	1663	700	525	1050	385	26
1130	1900	800	600	1200	440	30

*Typical operating wattage is measured at 24 V dc





Illumination

Light up a space to increase productivity and improve worker ergonomics and safety.

- Low bay task lights bring extra light where needed when high bay or ceiling lights are insufficient or are blocked by structures
- Task lights provide bright, focused light for finer tasks at workstations
- Heavy-duty machine lights allow operators to see into machine enclosures to visually monitor machine processes

Indication

Use colored light to provide visual status updates.

- Tower lights and other indicators can change colors and/or flash when a change in status has occurred
- Let a manager know he or she is needed at a station
- Alert an operator that a machine has jammed or material needs to be refilled

Illumination + Indication

EZ-STATUS® models combine illumination and multiple indication capabilities in a single device.

- Promotes faster responses to status changes
- Improves ergonomics and limits wasted movement
- Reduces the risk of costly mistakes and accidents


Multicolor with EZ-STATUS®

Challenge

- At workstations, operators may not see tower lights unless they are looking up and in the general direction of the indicator
- Operators may tune out audible alarm cues
- Not seeing or hearing an alert right away slows response time

Solution

- Multicolor task lights provide illumination during normal operation and offer a large variety of color options for status indication
- When an alert occurs, the task light turns a designated color, flooding the whole work space with that color

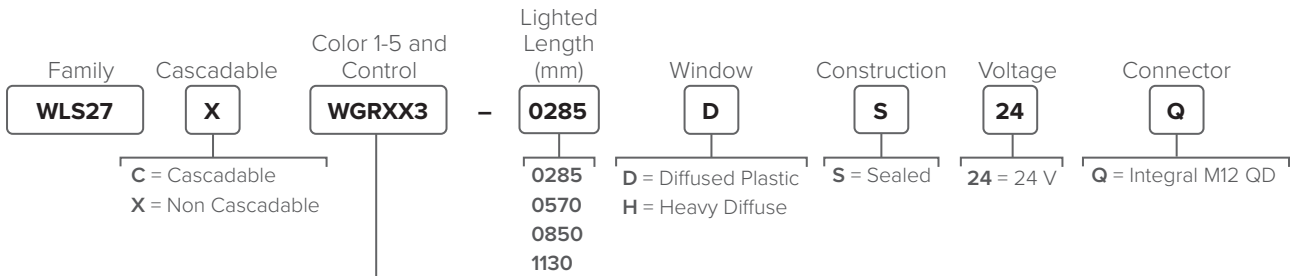


WGRXX3 = White, Green, and Red with override control
WYRXX3 = White, Yellow, and Red with override control
GYRXX3 = Green, Yellow, and Red with override control
WGRYB5 = White, Green, Red, Yellow, and Blue with binary control
WGRXX6 = White, Green, and Red with I/O Block control
WYRXX6 = White, Yellow, and Red with I/O Block control
GYRXX6 = Green, Yellow, and Red with I/O Block control

Length (mm)	Lumens (Typical @ 25 °C)					Typical Wattage* (Watts)
	Daylight White	Red	Green	Blue	Yellow	
0285	650	185	400	125	570	7
0570	1300	370	800	250	1140	15
0850	1950	555	1200	375	1710	22
1130	2600	740	1600	500	2280	30

*Typical operating wattage is measured at 24 V dc

Specifications

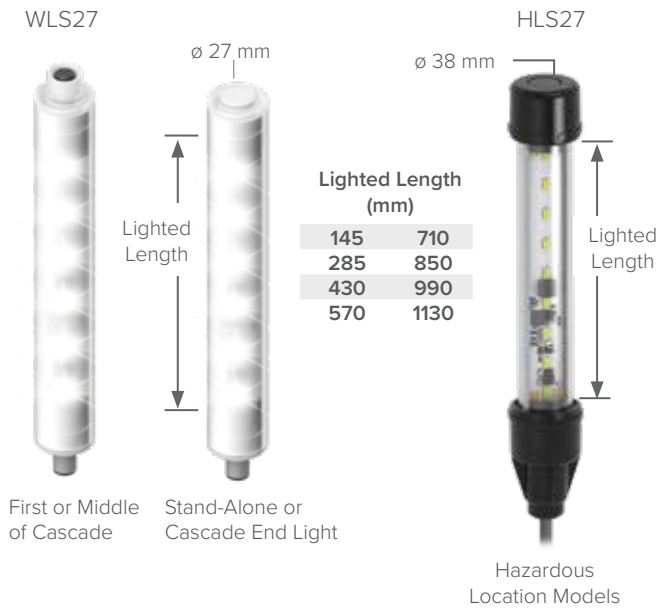

Supply Voltage

Single-, Dual-color, HLS27 models: 12 to 30 V dc
Multicolor models: 24 V dc

Construction

Clear anodized aluminum inner housing
All WLS27 models: FDA-grade copolyester outer housing
HLS27 models: UV stabilized polycarbonate outer housing

Operating/Storage Temperature

Single-, Dual-color, HLS27 models: -40 to +70 °C
Multicolor models: -40 to +50 °C

Connections

All WLS27 models: Integral 4-pin M12 quick disconnect fitting (4-pin connecting cordset required)
HLS27 models: 2.0 m (6.3 ft) ITC-ER cable with unterminated tinned leads

Environmental Rating

All WLS27 models: IEC IP66, IP67, IP69K per DIN 40050
HLS27 models: IEC IP66, IEC IP67


Vibration and Mechanical Shock

Vibration 10-55 Hz 1.0 mm p-p amplitude per IEC 60068-2-6
Shock 15G 11 ms duration, half sine wave per IEC 60068-2-27


Certifications

WLS27 models: HLS27 models:

Accessories

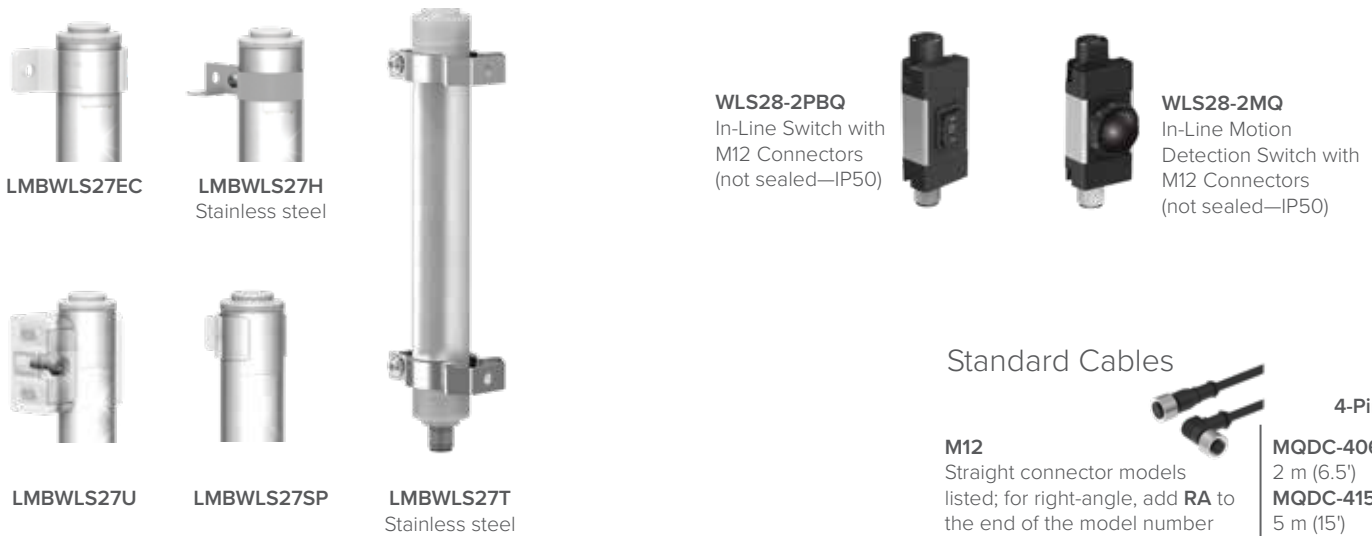

IP69K Washdown Cables

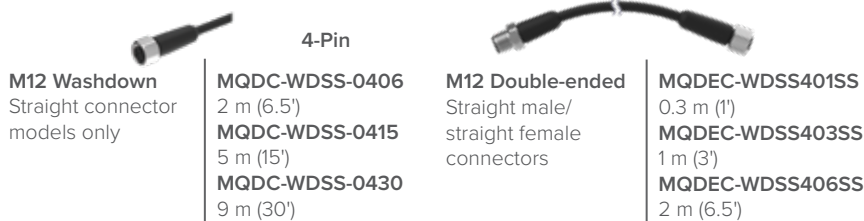

Standard Cables

