


Performance
P14 Node
MultiHop
H14 Slave




- **Easily add** a monitoring point to your wireless network
- **Inputs include:** one configurable discrete, one configurable analog, one thermistor, one asynchronous counter, and one SDI-12 (H14 only)
- **Field-wireable terminal** for wiring I/O
- **D-cell lithium battery** for a completely wireless solution



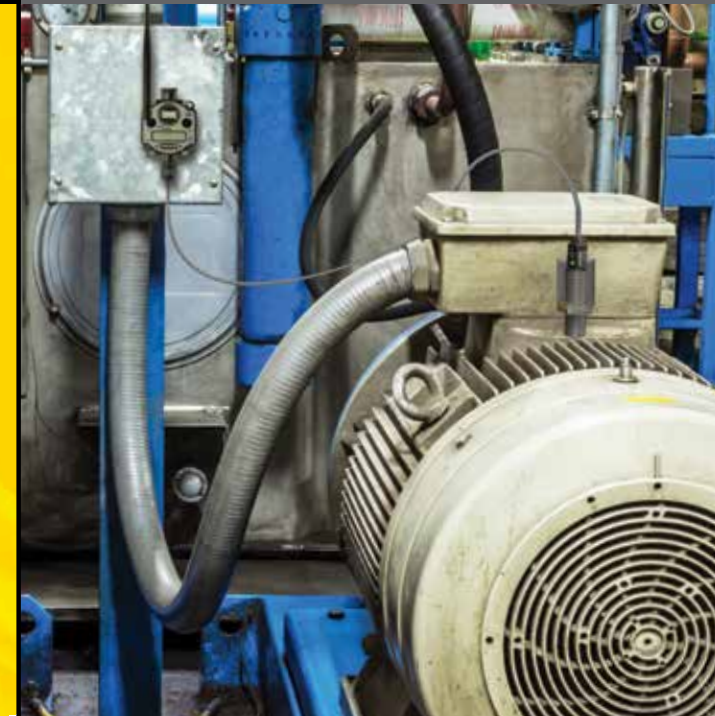

Field-wireable terminals for wiring I/O

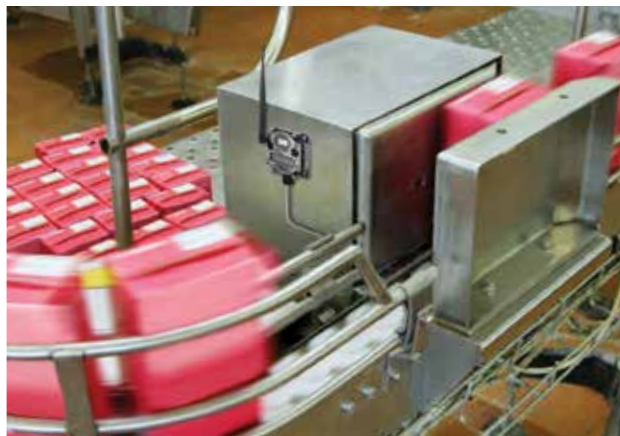

High Speed Counter



Tank Level Monitoring



Door Monitoring



Non-Contact Temperature Monitoring

Compatible Banner Products

Ultrasonic Sensors




U-GAGE T30UX



U-GAGE QT50ULB

Wireless Tower Lights



TL70 Wireless Modular Tower Light

Non-Contact Temperature Sensors



T-GAGE M18T

Models	Description	Frequency
DX80N9X1S-P14	Performance node with internal battery and discrete, analog, thermistor, and asynchronous counter inputs	900 MHz
DX80N2X1S-P14		2.4 GHz
DX80DR9M-H14	MultiHop Modbus slave with internal battery and discrete, analog, thermistor, SDI-12 and asynchronous counter inputs	900 MHz
DX80DR2M-H14		2.4 GHz

Order Now



Talk with an app engineer. Get product specs. Order now.

1-888-373-6767 • bannerengineering.com

Minneapolis, MN

